

## Rustik (8-12mm)

A decorative stone carpet system containing natural stone aggregates for internal use.



### Decorative:

Stone carpet systems designed to bring the beauty of the outdoors inside.



### Slip Resistant:

Positively textured profile to minimize the risk of slip and trip accidents.



### Fast Installation:

Hand broadcast aggregates ensure large areas can be installed quickly.



### Wear Resistant:

Excellent scratch and wear resistance to foot and tire traffic.



### Low Odour:

Low odor installation, non-toxic, solvent free formulation.




Natural Light



Natural Dark

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your regional Flowcrete office.



## Technical Profile

### SLIP RESISTANCE

BS 7976-2 Dry 59 Wet 45

### ABRASION RESISTANCE

BS 8204-2 Class AR2 – Medium duty industrial and commercial

### IMPACT RESISTANCE

ISO6272 1 kg weight > 1.8 metres  
2 kg weight > 1.5 metres

### TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 50°C

### COMPRESSIVE STRENGTH

BS 6319 50 N/mm<sup>2</sup>

### FLEXURAL STRENGTH

BS 6319 10 N/mm<sup>2</sup>


### BOND STRENGTH

> 1.5 mPa

### TOXICITY

Taint free to sensitive foodstuffs.

SPEED OF CURE**	10 °C	20 °C	30 °C
Light Traffic	36 hrs	24 hrs	24 hrs
Full Traffic	72 hrs	48 hrs	48 hrs
Full Chemical Cure	12 days	7 days	7 days

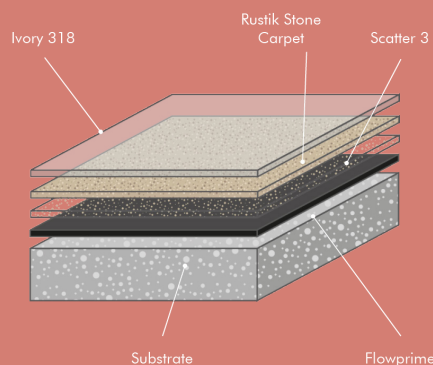

\*\*Cure times at temperatures between 0–30 °C can be achieved by altering the quantity of catalyst used.  
For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

## Model Specification

<b>System</b>	Rustik
<b>Finish</b>	Gloss
<b>Thickness</b>	8-12mm
<b>Colour</b>	See standard colour chart
<b>Manufacturer</b>	Flowcrete SA (Pty) Ltd

Preparatory work and application in accordance with manufacturer's instructions.

## Products Included In This System

<b>Primer</b>	Flowprime
<b>Scatter</b>	Scatter 3
<b>Topping</b>	Rustik Stones
<b>Sealer</b>	Ivory 318

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitence, dust and other contamination. Substrate should be dry to 75% RH as per BS8204.

## Installation Service

The installation should be carried out by an Approved Flowcrete Applicator. For details of our Approved Applicators, contact your regional Flowcrete office. Detailed application instructions are available upon request.

## Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs and maintenance. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained application teams.

## Focus on the Floorzone

Flowcrete is a market leader in specialist industrial and commercial flooring. Systems available include: floor screeds, surface damp proof membranes, decorative flooring, seamless terrazzo, car park deck coatings, tank lining systems... to name just a few. Our objective is to satisfy your Floorzone needs.

## Warranty

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages. Please review warranty in detail before installing the products.

[02/08/17]