



RUSTIK

Seamless attractive stone carpets for:

- ✓ Retail Outlets
- ✓ Residential Buildings
- ✓ Car Showrooms
- ✓ Offices & Lobbies
- ✓ Walkways & Paths
- ✓ Hotels & Resorts

Rustik Range Technical Profile



Rustik, Flowcrete’s range of decorative stone carpet systems, delivers a wide range of natural and contemporary tones to suit both indoor and outdoor environments.

Whether in a retail or office environment, leisure complex or showroom, Rustik won’t fail to impress. Boasting slip and chemical resistance, as well as superior durability, Rustik transforms dull commercial environments whilst delivering a floor finish that withstands cleaning products and chemical attack, provides a safe finish underfoot and stands the test of time.

Rustik can be installed in a variety of patterns using brass or aluminium trims, which are laid on the surface of the floor in a matrix that designates each area of the design. Rustik is then simply used to fill each shape, using contrasting colours to create a truly unique and personalised design.

What’s more, the Rustik range benefits from a speedy installation process, reducing impact on trade in commercial businesses, where keeping downtime to a minimum is crucial.

Application Suitability



Retail Outlets



Car Showrooms



Walkways & Paths



Residential



Offices & Lobbies



Hotels & Resorts



Technical Profile

APPLICATION SUITABILITY

- ✓ New Build
- ✓ Refurbishment

SLIP RESISTANCE

BS 7976-2
Dry 59
Wet 45

FIRE RESISTANCE

SITAC
Class G
Certificate No 1721/75

TEMPERATURE RESISTANCE


Tolerant of sustained temperatures up to 50°C

COMPRESSIVE STRENGTH

BS 6319
40 N/mm²

BOND STRENGTH

>1.5MPa*

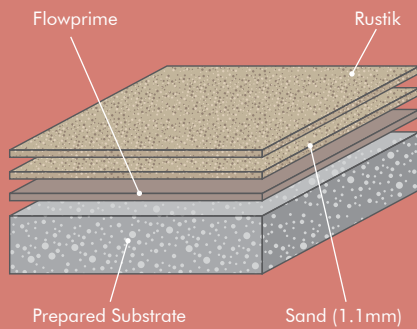

*Assumes concrete compressive strength is greater than 25 N/mm²

Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

Rustik

Rustik comes in a variety of colourful natural stones encapsulated in a clear epoxy resin, resulting in attractive indoor anti-slip flooring.

Rustik cosmetically enhances, reduces noise and is highly resistant to chemicals, making it suitable for a variety of indoor environments from showrooms and shopping centres to spas, offices and more.



Attractive:

Decorative finish to transform dull commercial environments.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



Reduces Noise:

Minimises unwanted noise from footsteps in busy commercial spaces.



Versatile:

Rustik can be applied vertically to walls.



The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Rustik UV

Rustik UV contains colourful natural stones, encapsulated in an aliphatic, UV stable polyurethane resin, providing attractive outdoor anti-slip flooring.

Designed to be a flexible solution for areas with heavy traffic, Rustik UV is weather resistant and offers a durable alternative to loose pebbles, whilst maintaining the natural beauty of the outdoors.



Attractive:

Decorative finish to transform dull commercial environments.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



UV Resistant:

Suitable for outdoor environments and resistant against colour damage.



Reduces Noise:

Minimises unwanted noise from footsteps in busy commercial spaces.

Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Technical Profile

APPLICATION SUITABILITY

✓ New Build

✓ Refurbishment

SLIP RESISTANCE

TRRL Pendulum Slip Test

Dry >40
Wet 36

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 65°C


COMPRESSIVE STRENGTH

BS 6319


>30 N/mm²

BOND STRENGTH

> 1.5MPa*

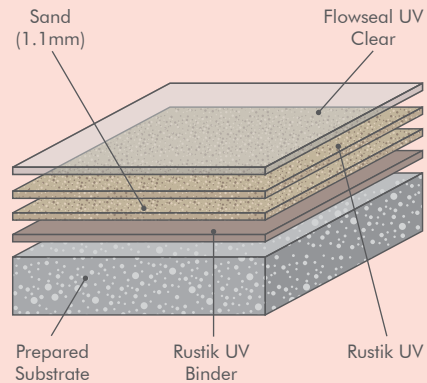

*Assumes concrete compressive strength is greater than 25 N/mm²

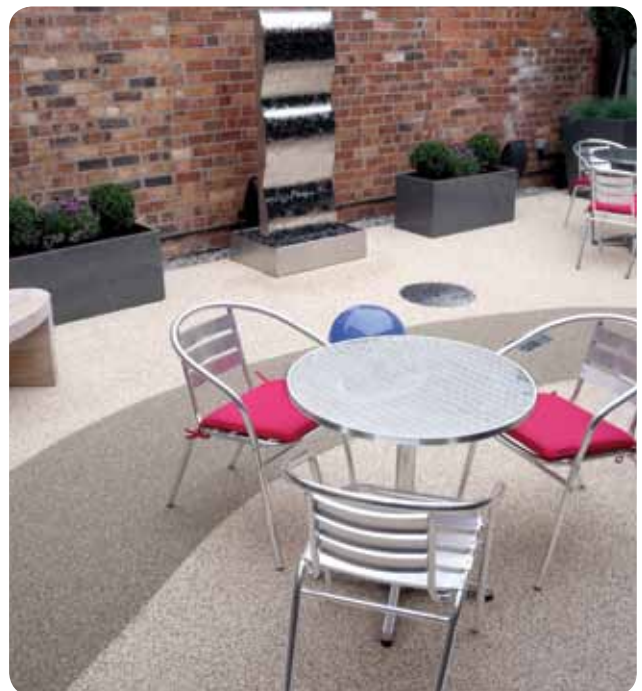



Naturewalk

A seamless and slip resistant bonded gravel system, made of natural stone aggregates to complement a variety of outdoor settings.

Naturewalk is an attractive and versatile range. Offering a durable alternative to loose gravel, Naturewalk is ideal for environments subject to heavy foot traffic such as leisure complexes, theme parks and holiday resorts.



Slip-resistant:

The various aggregates help increase grip for foot traffic.



Attractive:

A range of eye-catching colours can be laid in unique patterns.



Easy to Clean:

A seamless, smooth finish that is easy to clean and maintain.



Fast Curing:

Minimises downtime for less interruption to industry.

Colours



Charcoal



Night Fever



Diesel



Chocky



Copper



Dockyard Blue



Kiwi



Graphite



Natural



Lime White



Cauliflower

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Technical Profile

APPLICATION SUITABILITY

✓ New Build ✓ Refurbishment

SLIP RESISTANCE

Good wet and dry slip resistance from the textured aggregate.

TEMPERATURE RESISTANCE

Softens over 70°C, hardens on cooling

WATER PERMEABILITY

Karsten Test Nil (Impermeable)

IMPACT RESISTANCE

ISO 6272 1kg weight > 1.8m
2kg weight > 1.5m

ABRASION RESISTANCE

Dependant upon aggregate selection


CHEMICAL RESISTANCE

Good resistance to tea, coffee, cola, fruit juice, detergents and bleach.

BOND STRENGTH


> 1.5 MPa*

SPEED OF CURE**	10°C	20°C	30°C
Light Traffic	2 hrs	2 hrs	2 hrs
Full Traffic	24 hrs	24 hrs	24 hrs
Full Chemical Cure	7 days	7 days	7 days

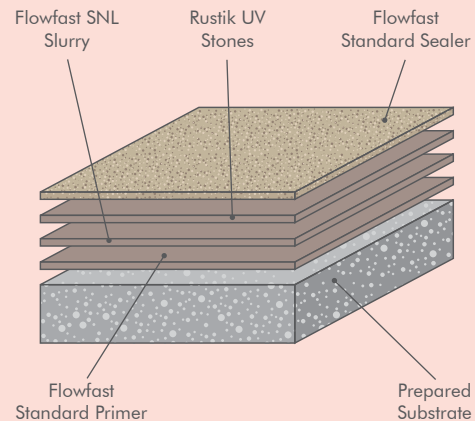

*Assumes concrete compressive strength is greater than 25N/mm²

** Cure times at temperatures between 0-30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

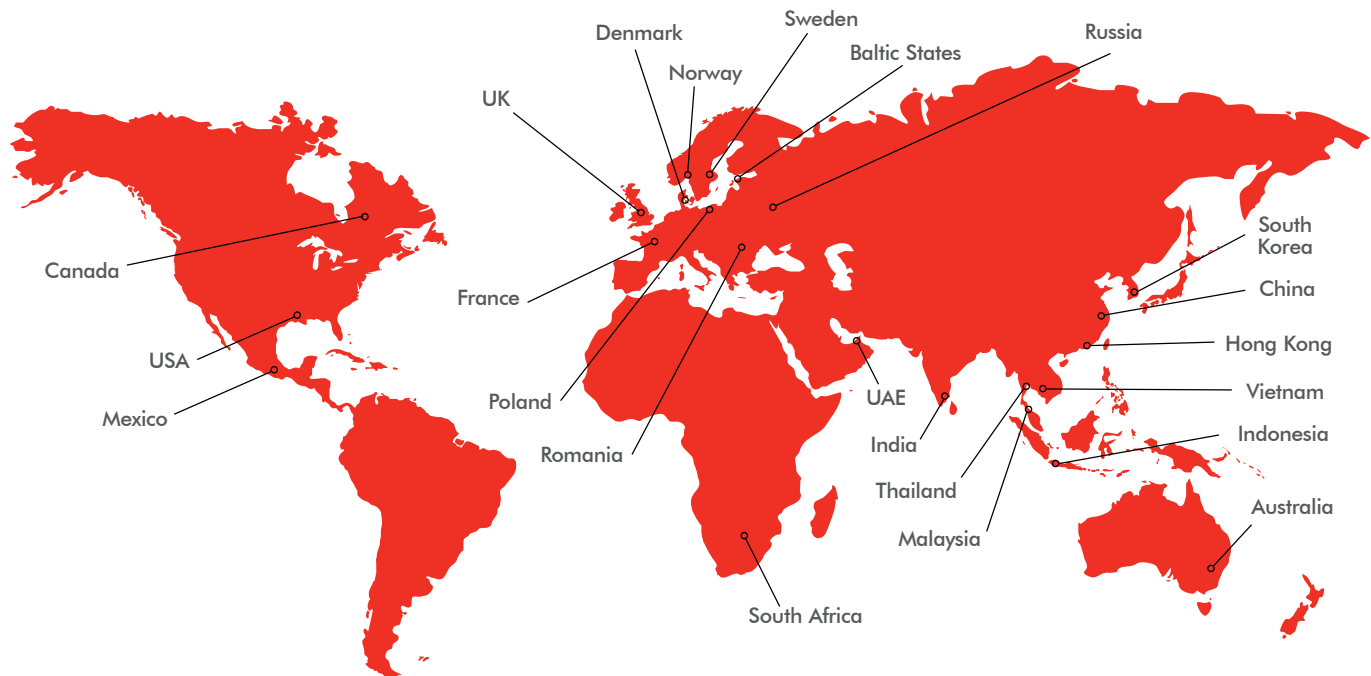

Flowcrete around the world

Manufacturing Centres

UK	Flowcrete UK Ltd	Tel: +44 1270 753 000	Fax: +44 1270 753 333	Email: uk@flowcrete.com
Sweden	Flowcrete Sweden AB	Tel: +46 42 600 07 00	Fax: +46 42 15 50 90	Email: sweden@flowcrete.com
Poland	Flowcrete Polska Sp. z.o.o.	Tel: +48 22 879 8907	Fax: +48 22 879 8918	Email: poland@flowcrete.com
India	Flowcrete India Pvt Ltd	Tel: +91 44 4202 9831	Fax: +91 44 4202 9832	Email: india@flowcrete.com
Malaysia	Flowcrete Asia Sdn Bhd	Tel: +60 3 6277 9575	Fax: +60 3 6277 4645	Email: malaysia@flowcrete.com
South Africa	Flowcrete SA (Pty) Ltd	Tel: +27 31 461 3411	Fax: +27 31 461 3475	Email: southafrica@flowcrete.com
USA	Flowcrete North America Inc.	Tel: +1 936 539 6700	Fax: +1 936 539 6701	Email: usa@flowcrete.com

Sales Centres

Australia	Flowcrete Australia Pty Ltd	Tel: +61 7 3205 7115	Fax: +61 7 3205 3116	Email: australia@flowcrete.com
Baltic States	Flowcrete Baltics	Tel: +37 1 2864 4666	Fax: +48 22 879 8918	Email: latvia@flowcrete.com
Canada*	Flowcrete Canada	Tel: +1 936 539 6700	Fax: +1 936 539 6701	Email: canada@flowcrete.com
China	Flowcrete China	Tel: +86 10 8472 1912	Fax: +86 10 8472 1942	Email: china@flowcrete.com
Denmark	Flowcrete Sweden AB	Tel: +45 3155 7882	Fax: +46 42 15 50 90	Email: denmark@flowcrete.com
France	Flowcrete France SAS	Tel: +33 1 60 61 74 42	Fax: +33 1 64 33 11 61	Email: france@flowcrete.com
Hong Kong	Flowcrete (Hong Kong) Ltd	Tel: +852 2795 0478	Fax: +852 2795 4842	Email: hongkong@flowcrete.com
Indonesia	Flowcrete Indonesia	Tel: +62 21 252 3201	Fax: +62 21 252 0720	Email: indonesia@flowcrete.com
Mexico*	Flowcrete Mexico	Tel: +1 936 539 6700	Fax: +1 936 539 6701	Email: mexico@flowcrete.com
Norway	Flowcrete Norway AS	Tel: +47 6486 0830	Fax: +47 6486 0831	Email: norway@flowcrete.com
Romania*	S.C. Flowcrete Romania s.r.	Tel: +40 374 00 80 78	Fax: +40 21 255 03 15	Email: romania@flowcrete.com
Russia*	Flowcrete RUS	Tel: +7 (495) 645 83 18	Fax: +7 (495) 645 83 18	Email: rus@flowcrete.com
South Korea*	Fcrete Corporation	Tel: +82 2 2649 3874	Fax: +82 2 2649 3878	Email: southkorea@flowcrete.com
Thailand	Flowcrete International (Thailand) Co.,Ltd.	Tel: +66 2539 3424	Fax: +66 2539 3427	Email: thailand@flowcrete.com
UAE	Flowcrete Middle East FZCO	Tel: +97 14 886 4728	Fax: +97 14 886 4582	Email: uae@flowcrete.com
Vietnam	Flowcrete Vietnam	Tel: +84 8 38216561	Fax: +84 8 3821 6501	Email: vietnam@flowcrete.com

*Partner Company

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserve the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.