



Deckshield ID (1.5mm)

A flexible polyurethane deck coating system for use on intermediate decks of multi-story parking structures.



UV Resistant:

100% UV stable formulation available to prevent the floor from yellowing.



Slip Resistant:

Positively textured anti-slip surface minimizes slip and skid risks.



Chemical Resistant:

Protects against diesel, fuel, antifreeze, hydraulic fluid, chlorides and battery acid.



Noise Reducing:

Enhanced traction underfoot minimizes unpleasant noise from tire squeal.



Attractive:

Brightens up dull, dark car parks.



Beige

Yellow

Signal Red



Forest Green

Tile Red

Dark Blue



Light Grey

Mid Grey

Dark Grey

The applied colours may differ from the examples shown.
For a full colour chart and samples, contact your regional Flowcrete office.

Technical Profile

TEMPERATURE RESISTANCE

Softens over 70°C, hardens on cooling

WATER PERMEABILITY

Karsten Test	Nil (Impermeable)
--------------	-------------------

BOND STRENGTH

> 1.5 MPa* (primed concrete)

FIRE RESISTANCE

BS476-3	Designated EXT.FAA
---------	--------------------

SLIP RESISTANCE


TRRL Pendulum Slip Test	Dry >40, Wet >40 (low slip potential)
-------------------------	--

ABRASION RESISTANCE

Taber Abrader (1kg load using H-22 wheels)	40mg loss per 1000 cycles
--	---------------------------

SPEED OF CURE**	10° C	20° C	30° C
Light Traffic	30 hrs	16 hrs	10 hrs
Full Traffic	36 hrs	24 hrs	16 hrs
Full Chemical Cure	12 days	7 days	5 days

*Assumes concrete compressive strength is greater than 25 N/mm²

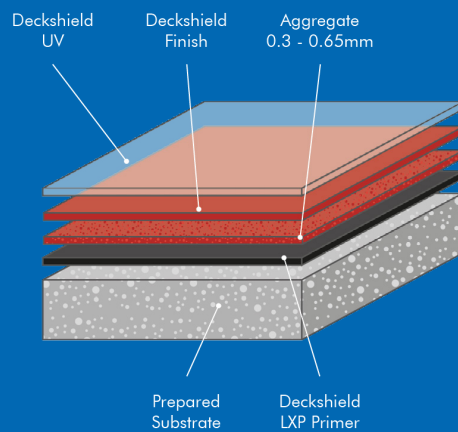

**Cure times at temperatures between 0-30° C can be achieved by altering the quantity of catalyst used.
For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

Model Specification

System	Deckshield ID
Finish	Gloss
Thickness	1.5mm
Colour	See standard colour chart
Manufacturer	Flowcrete SA (Pty) Ltd

Preparatory work and application in accordance with manufacturer's instructions.

Products Included In This System

Primer	Deckshield LXP Primer
Scatter	Scatter 4
Topping	Deckshield Finish
Sealer	Deckshield UV

Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm², free from laitence, dust and other contamination. Substrate should be dry to 75% RH as per BS8204.

Installation Service

The installation should be carried out by an Approved Flowcrete Applicator. For details of our Approved Applicators, contact your regional Flowcrete office. Detailed application instructions are available upon request.

Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs and maintenance. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained application teams.

Focus on the Floorzone

Flowcrete is a market leader in specialist industrial and commercial flooring. Systems available include: floor screeds, surface damp proof membranes, decorative flooring, seamless terrazzo, car park deck coatings, tank lining systems... to name just a few. Our objective is to satisfy your Floorzone needs.

Warranty

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages. Please review warranty in detail before installing the products.

[05/10/18]