



Flowfresh MF (3 to 4mm)

A self-levelling, HACCP International certified, smooth, antimicrobial treated cementitious polyurethane floor system.



Chemical Resistant

Protects against the majority of acids used in manufacturing processes.



Hygienic

Contains Polygiene®, an antimicrobial additive that kills up to 99.9% bacteria.



Abrasion Resistant

Holds its own against impact, traffic and chemical attack.



Easy to Clean

Minimal joints make this flooring easy to sterilise.



Low Odour

Improved air quality during installation and beyond.



Cream



Yellow Ochre



Sand Yellow



Tomato Red



Signal Grey



Signal Green



Dusty Grey



Light Blue

Technical Profile

FIRE RESISTANCE

SANS 10177 – Part 4

Class 2

WATER PERMEABILITY

Karsten Test

Nil (impermeable)

TEMPERATURE RESISTANCE

-5°C to 70°C at 3mm

-15°C to 90°C at 4mm

SLIP RESISTANCE

TRRL Pendulum Slip Test

Dry: >70

Wet: >25

COMPRESSIVE STRENGTH

BS 6319

> 50 N/mm²

FLEXURAL STRENGTH

BS 6319

> 20 N/mm²

TENSILE STRENGTH

BS 6319

> 12 N/mm²

BOND STRENGTH

> 1.5 MPa concrete failure


COEFFICIENT OF THERMAL EXPANSION

ASTM C531

$5.70 \times 10^{-5} \text{ }^{\circ}\text{C}^{-1}$

* These figures are typical properties achieved in laboratory tests at 20°C and at 50% relative humidity.

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	10 days	7 days	6 days

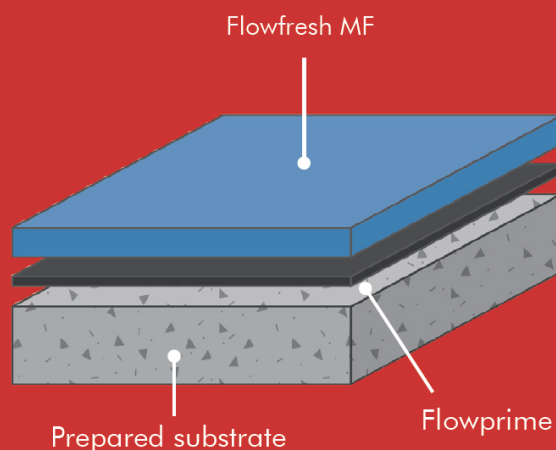

The applied colours may differ from the examples shown.

For a full colour chart and samples, contact your regional Flowcrete office.

July 2026 replaces November 2021

(Flowfresh MF)

To the best of our knowledge, the technical data contained herein are true and accurate at the date of issuance and are subject to change without prior notice. User must contact StonCor Africa to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. We guarantee our products to conform to StonCor Africa Quality Control. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any, is limited to replacement of products. Prices and cost data, if shown, are subject to change without prior notice. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY STONCOR AFRICA, EXPRESS OR IMPLIED, STATUTORY BY OPERATION OF LAW OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

Model specification

System	Flowfresh MF
Finish	Matt
Thickness	3 to 4mm

Preparatory work and application in accordance with manufacturer's instructions.

Products included in this system

Primer	Flowprime
Scatter	Scatter 4
Screed	Flowfresh MF

Substrate requirements

Concrete or screed substrate should be a minimum of 25 N/mm², and maintain a minimum tensile strength of 1.5 MPa, free from laitance, dust and other contamination. The substrate should have a moisture content of no more than 5%.

Installation service

The installation should be carried out by an Approved Applicator. For details of our Approved Applicators, contact our regional office. Detailed application instructions are available upon request.

Aftercare, cleaning & maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Colour stability

Flowfresh MF is not colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in light colours and blue's but does not compromise the product's chemical resistance or physical characteristics. Consult our Technical Department for UV light-stable specification.

Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs and maintenance. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained application teams.

Focus on the Floorzone

Flowcrete is a market leader in specialist industrial and commercial flooring. Systems available include floor screeds, surface damp proof membranes, decorative flooring, seamless terrazzo, car park deck coatings, tank lining systems ... to name just a few. Our objective is to satisfy your Floorzone needs.

Polygiene® and HACCP International

Flowfresh flooring systems are antimicrobial to ISO 22196 standard, owing to the inclusion of Polygiene®, an antimicrobial additive incorporated in the formulation. The Flowfresh range of floor systems is HACCP International certified as safe for use in food environments.

Warranty

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard "Warranty, Terms and Conditions of Sale", copies of which can be obtained on request. Warranty does not cover suitability, fit-for-purpose or any consequential or related damages. Please review warranty in detail before installing products.