



ACCELGUARD® 80

NON-CHLORIDE, ACCELERATING & WATER REDUCING ADMIXTURE

EUCLID CHEMICAL

ACCELERATORS

ACCELGUARD® 80

MASTER FORMAT #:
00 00 00

DESCRIPTION

ACCELGUARD® 80 is an accelerating and water reducing admixture for concrete that does not contain calcium chloride. It improves properties of plastic and hardened concrete, provides a significant improvement in early stiffening and setting characteristics, improved workability and decreased bleeding and segregation. This admixture is compatible with air-entraining admixtures, HRWR admixtures (super plasticizers), and conventional water reducing admixtures. ACCELGUARD 80 is effective at all temperatures but is particularly effective above 10°C.

PRIMARY APPLICATIONS

- Cold weather concreting
- Structural and plain concrete
- Concrete block and mortar
- Precast and post tensioned concrete

FEATURES / BENEFITS



- Reduces initial set 1 to 4 hours depending on concrete temperatures
- Improves workability and provides denser concrete
- Minimizes bleeding and segregation
- Improves compressive strength development at early ages
- Decreases overtime allowing earlier finishing
- Increases protection for reinforcement in concrete

TECHNICAL INFORMATION

Performance Data

The following test results were achieved using typical ASTM C 494 mix design requirements, 307 kg/m³ cement content and similar (± 0.5)% air content.

These results were obtained under laboratory conditions with materials and mix designs meeting the specifications of ASTM C 494. Changes in materials and mix designs can affect the dosage response of ACCELGUARD 80.

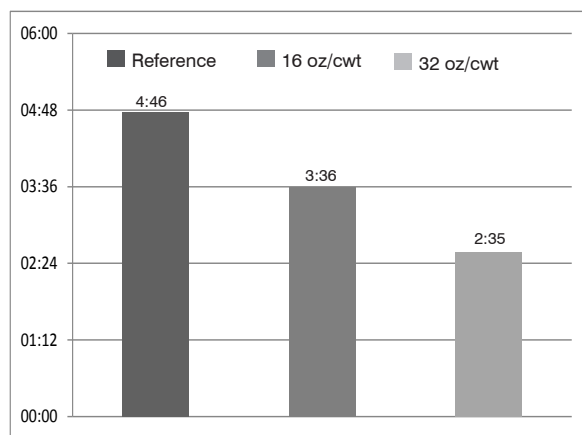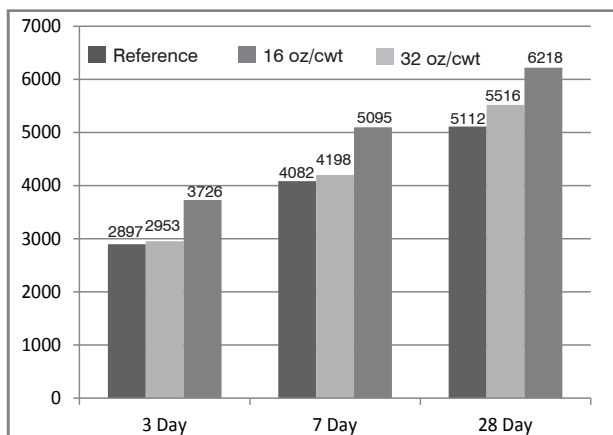

PACKAGING

ACCELGUARD 80 is packaged in bulk, 1041 L totes, 208 L drums and 18.9 L buckets.

SHELF LIFE

2 years in original, unopened container

SPECIFICATIONS/COMPLIANCES

- Fully complies with ASTM C 494, Type C and E admixture specifications
- Fully complies with AASHTO M 194
- ACI 201, Guide for Durable Concrete and ACI 302 Guide for Concrete Floor and Slab Construction prohibit the use of chlorides in many types of concrete. ACCELGUARD 80 may be used in these types of concrete such as, floors over prestressed concrete or galvanized decking, floors containing two kinds of embedded metal, reinforced concrete in moist environments and/or exposed to chloride deicing salts
- ANSI/NSF STD 61 registered

DIRECTIONS FOR USE

The typical dosage range for ACCELGUARD 80 is 780 - 5870 mL/100kg of cementitious material. Higher dosages are acceptable with prior testing and confirmation of the desired performance with specific materials being used.

ACCELGUARD 80 should be added to the initial batch water of the concrete mixture. Do not dispense onto dry cement. For ambient temperatures below 10°C follow ACI 306 Cold Weather Requirements.

PRECAUTIONS / LIMITATIONS

- ACCELGUARD 80 will freeze at temperatures of approximately -26°C. Freezing and thawing will not harm the material if thoroughly agitated.
- Do not use air for agitation.
- Do not dispense directly onto dry cement.
- Do not use ACCELGUARD 80 with Chemcomp Cement or other modified cements without consulting The Euclid Chemical Company.
- Keep concrete from freezing until a minimum of 3.5 MPa is achieved.
- In all cases, consult the Safety Data Sheet before use.

Rev: 07/11/16